



Optional: pro clima TESCON NAIDECK (mono) for underlays with seam and perforation protection (Class 3, German ZVDH) or for use as a temporary covering

Underlay from pro clima SOLITEX MENTO series

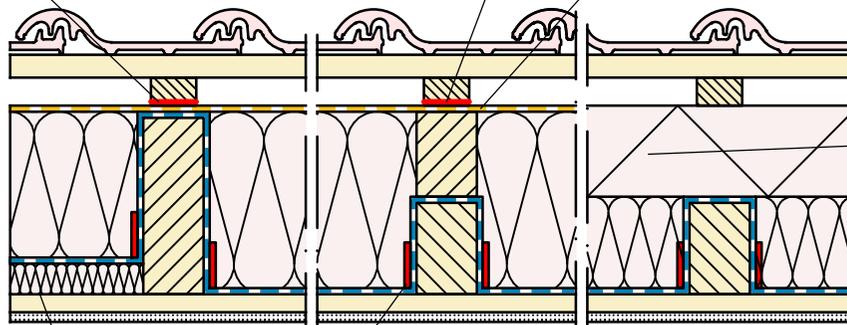

DASATOP FIX strips for mounting to sides of rafters

Optional: Mineral fibrous insulation as protective padding, R_{max} 20 % of R_{total}

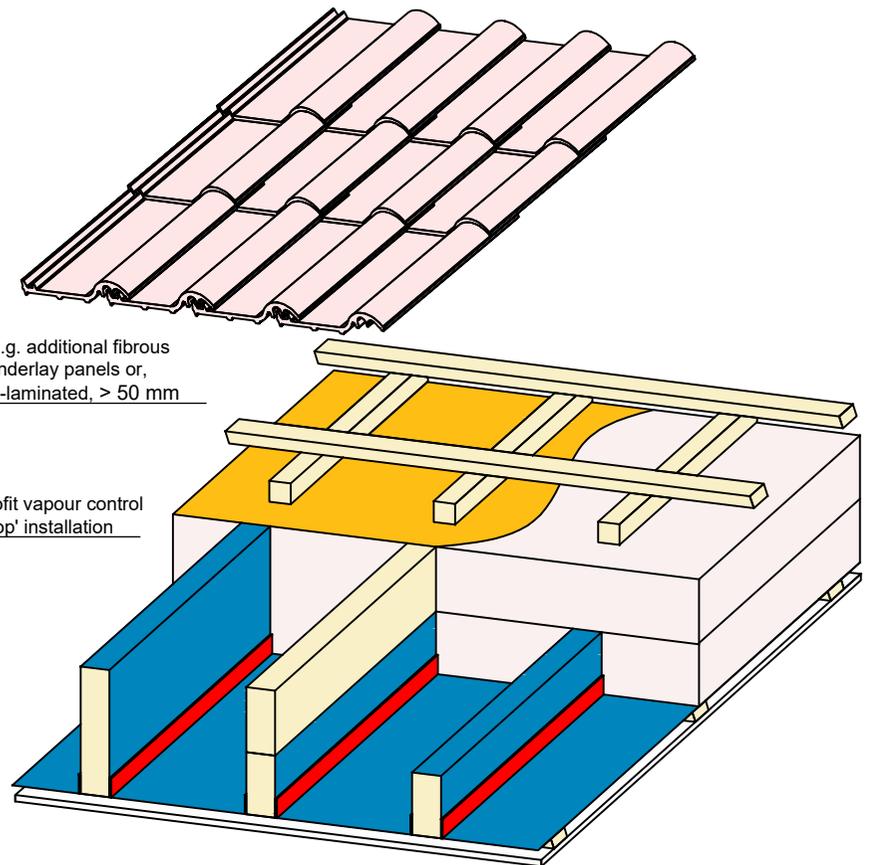

External roof insulation, e.g. additional fibrous insulation or wood-fibre underlay panels or, alternately, PU/PF, fleece-laminated, > 50 mm

Installation between rafters, fibrous

pro clima DASATOP retrofit vapour control membrane for 'sub-and-top' installation

Roof retrofit from the outside | Pitched roof | Standard structure, 'sub-and-top' installation

DASATOP retrofit membrane installed from the outside using 'sub-and-top' method. Fixed to the sides of the rafters using DASATOP FIX strips.

Typical structural situation to illustrate the airtightness and windtightness layers. When carrying out planning and performing installation on site, please observe the currently applicable technical regulations and the relevant pro clima recommendations for applications and installation (German version: 05/22; international version: 03/26).

pro clima ... and the insulation is perfect

