



Roof refurbishment from the outside | Pitched roof | Bargeboard, 'sub-and-top' installation, Var.1

DASATOP retrofit membrane installed from the outside using 'sub-and-top' method. Fixed to the sides of the rafters using DASATOP FIX strips.

Typical structural situation to illustrate the airtightness and windtightness layers. When carrying out planning and performing installation on site, please observe the currently applicable technical regulations and the relevant pro clima recommendations for applications and installation (German version: 05/22; international version: 03/26).

pro clima ... and the insulation is perfect



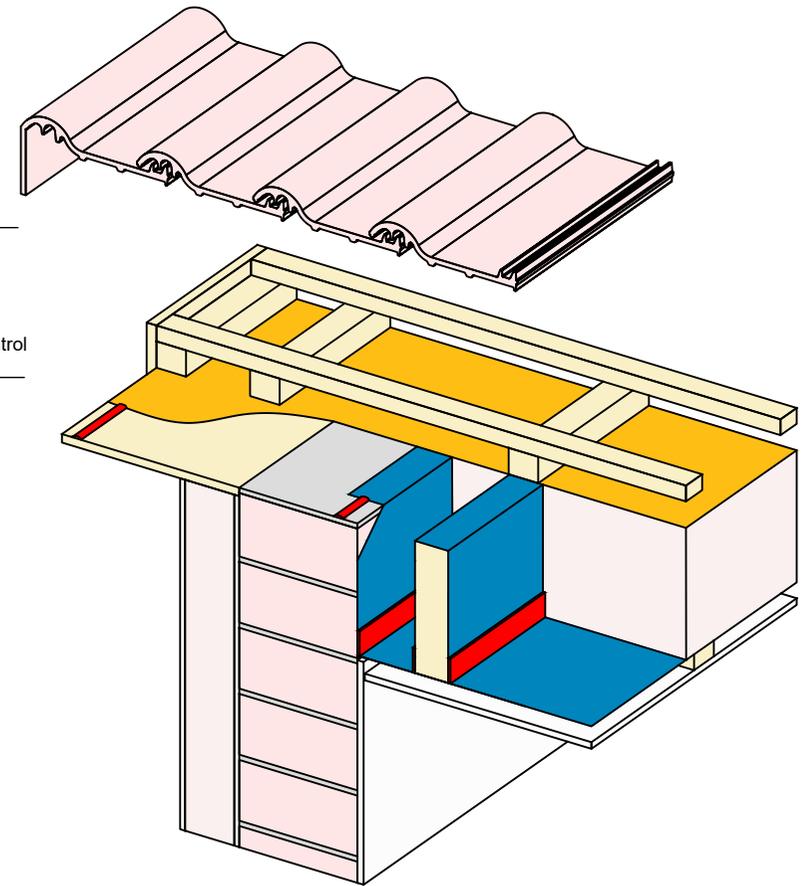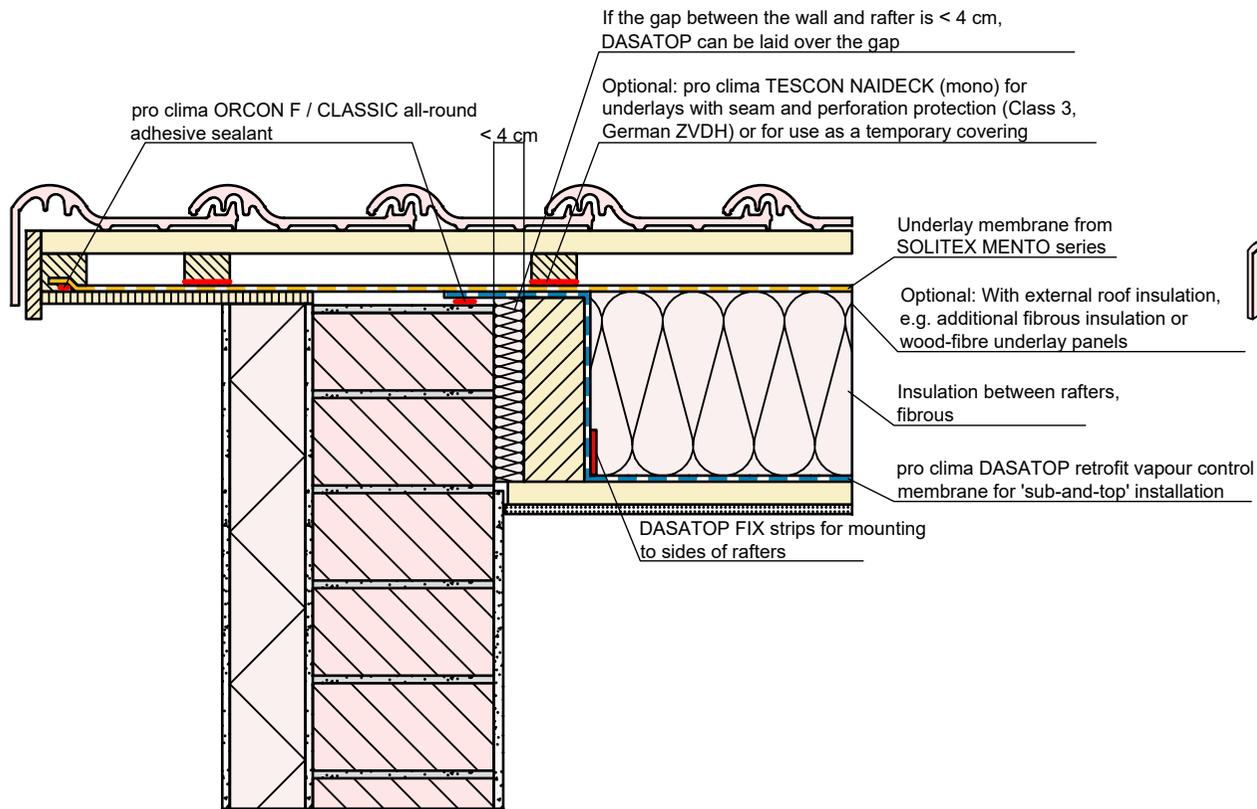

Roof refurbishment from the outside | Pitched roof | Bargeboard, 'sub-and-top' installation, Var. 2

DASATOP retrofit membrane installed from the outside using 'sub-and-top' method. Fixed to the sides of the rafters using DASATOP FIX strips.

Typical structural situation to illustrate the airtightness and windtightness layers. When carrying out planning and performing installation on site, please observe the currently applicable technical regulations and the relevant pro clima recommendations for applications and installation (German version: 05/22; international version: 03/26).

pro clima ... and the insulation is perfect

